


CLASSIC™



ECO-680-700M-66UHC-DGBF

BIFACIAL SOLAR MODULE G12 210mm

TOPCON

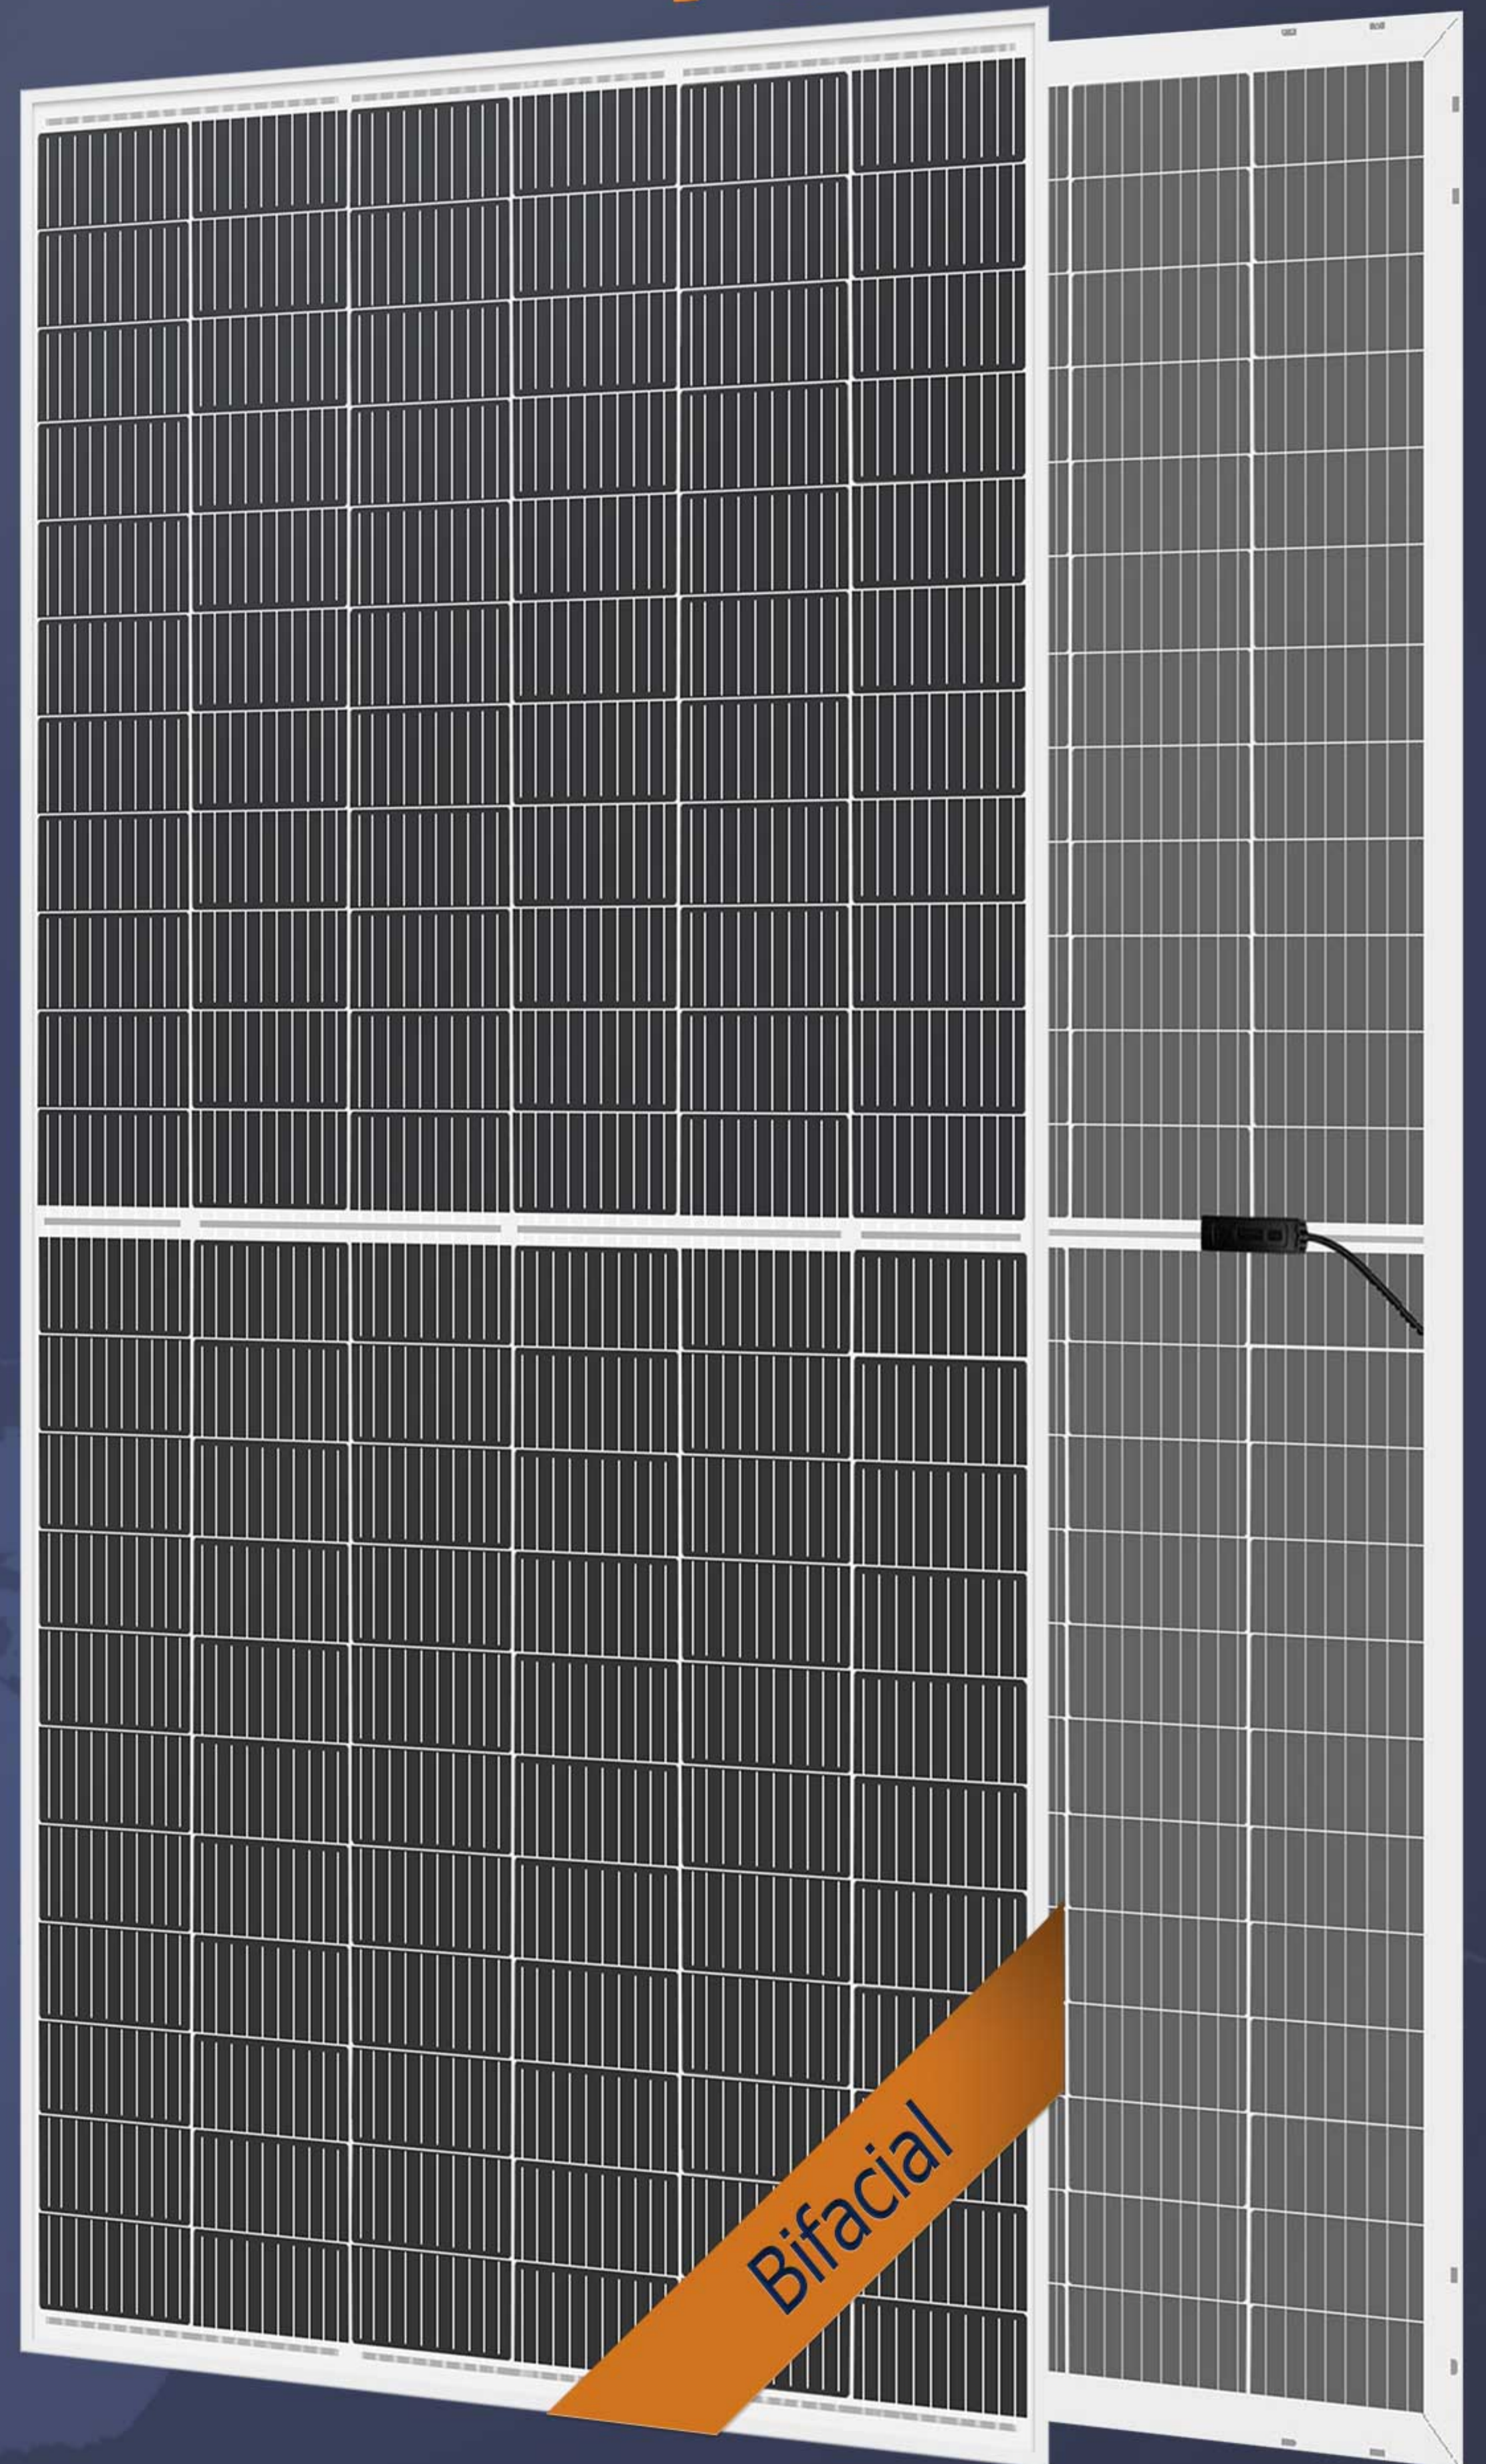

30 YEARS

PRODUCT MATERIAL &
WORKMANSHIP

30 YEARS 87.4%

LINEAR PERFORMANCE
WARRANTY

INNOVATIONAL
SMBB AND
HALF-CUT CELLS
TECHNOLOGY

REDUCE
INTERNAL LOSS
REDUCE
SHADOW LOSS

N TYPE
TOPCON CELL
TECHNOLOGY

EXCELLENT CELL
EFFICIENCY AND OUTPUT

PASSED THREE
TIMES IEC
STANDARD TEST

ADVANCED
BIFACIAL
EFFICIENCY

ECO DELTA Mono TOPCON (210) Half-cut Cell Double-glass-bifacial PV Module



ECO-680-700M-66UHC-DGBF

ELECTRICAL DATA @ STC		ECO-680M-66 UHC-DGBF	ECO-685M-66 UHC-DGBF	ECO-690M-66 UHC-DGBF	ECO-695M-66 UHC-DGBF	ECO-700M-66 UHC-DGBF
Peak Power(Pmax)	(W)	680	685	690	695	700
Maximum Power Voltage (Vmp)	(V)	38.55	38.74	38.94	39.13	39.33
Maximum Power Current(Imp)	(A)	17.64	17.68	17.72	17.76	17.80
Open-circuit Voltage (Voc)	(V)	46.50	46.69	46.88	47.07	47.26
Short-circuit Current(Isc)	(A)	18.69	18.74	18.79	18.84	18.89
Module Efficiency	(%)	21.89	22.05	22.21	22.37	22.53
Operating Temperature		-40°C~+85°C				
Maximum System Voltage		□1500V				
Maximum Series Fuse Rating		30A				
Mechanical Test Load		Front 5400Pa Rear 2400Pa				

*STC (Standard Test Condition): Irradiance 1000W/ m², Module Temperature 25°C, AM 1.5

ELECTRICAL DATA @ NMOT		ECO-680M-66 UHC-DGBF	ECO-685M-66 UHC-DGBF	ECO-690M-66 UHC-DGBF	ECO-695M-66 UHC-DGBF	ECO-700M-66 UHC-DGBF
Peak Power(Pmax)	(W)	513	517	521	525	529
MPP Voltage (Vmp)	(V)	36.15	36.36	36.56	36.74	36.94
MPP Current(Imp)	(A)	14.19	14.22	14.25	14.29	14.32
Open Circuit Voltage (Voc)	(V)	44.37	44.56	44.75	44.94	45.13
Short Circuit Current(Isc)	(A)	15.05	15.09	15.13	15.17	15.21

*Under Nominal Module Operating Temperature (NMOT), Irradiance of 800W/ m², Spectrum AM 1.5, Ambient Temperature 20°C, Wind Speed 1m/s

TEMPERATURE CHARACTERISTICS

Temperature coefficient of Pmax	-0.30%/k
Temperature coefficient of Voc	-0.25%/k
Temperature coefficient of Isc	0.04%/k
NMOT	43±2°C

MECHANICAL DATA

Cell Type	Mono-Crystalline, 210*105mm
Cell Arrangement	132pcs (2(6*11))
Dimension (L×W×H)	2384 x 1303 x 35mm
Weight	38kg
Front Cover	2.0mm high transmittance, AR coated heat strengthened glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68, 3 Bypass Diodes
Cable Type	4mm ²
Length of Cable	1400mm
Connector	Compatible with MC4 PV Connector

OPTIONAL

Frame	□Black
Backsheet	2.0mm high transmittance, heat strengthened glass
Connector	□Original MC4
Cable	□Customized
Module Size	□Customized


PACKING MANNER

Packing Type	40'HQ
Piece/Pallet	31
Piece/Container	558

*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, ECO DELTA POWER CO., LTD Reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

Current-Voltage Curve under different irradiance

Cell Temperature: 25°C

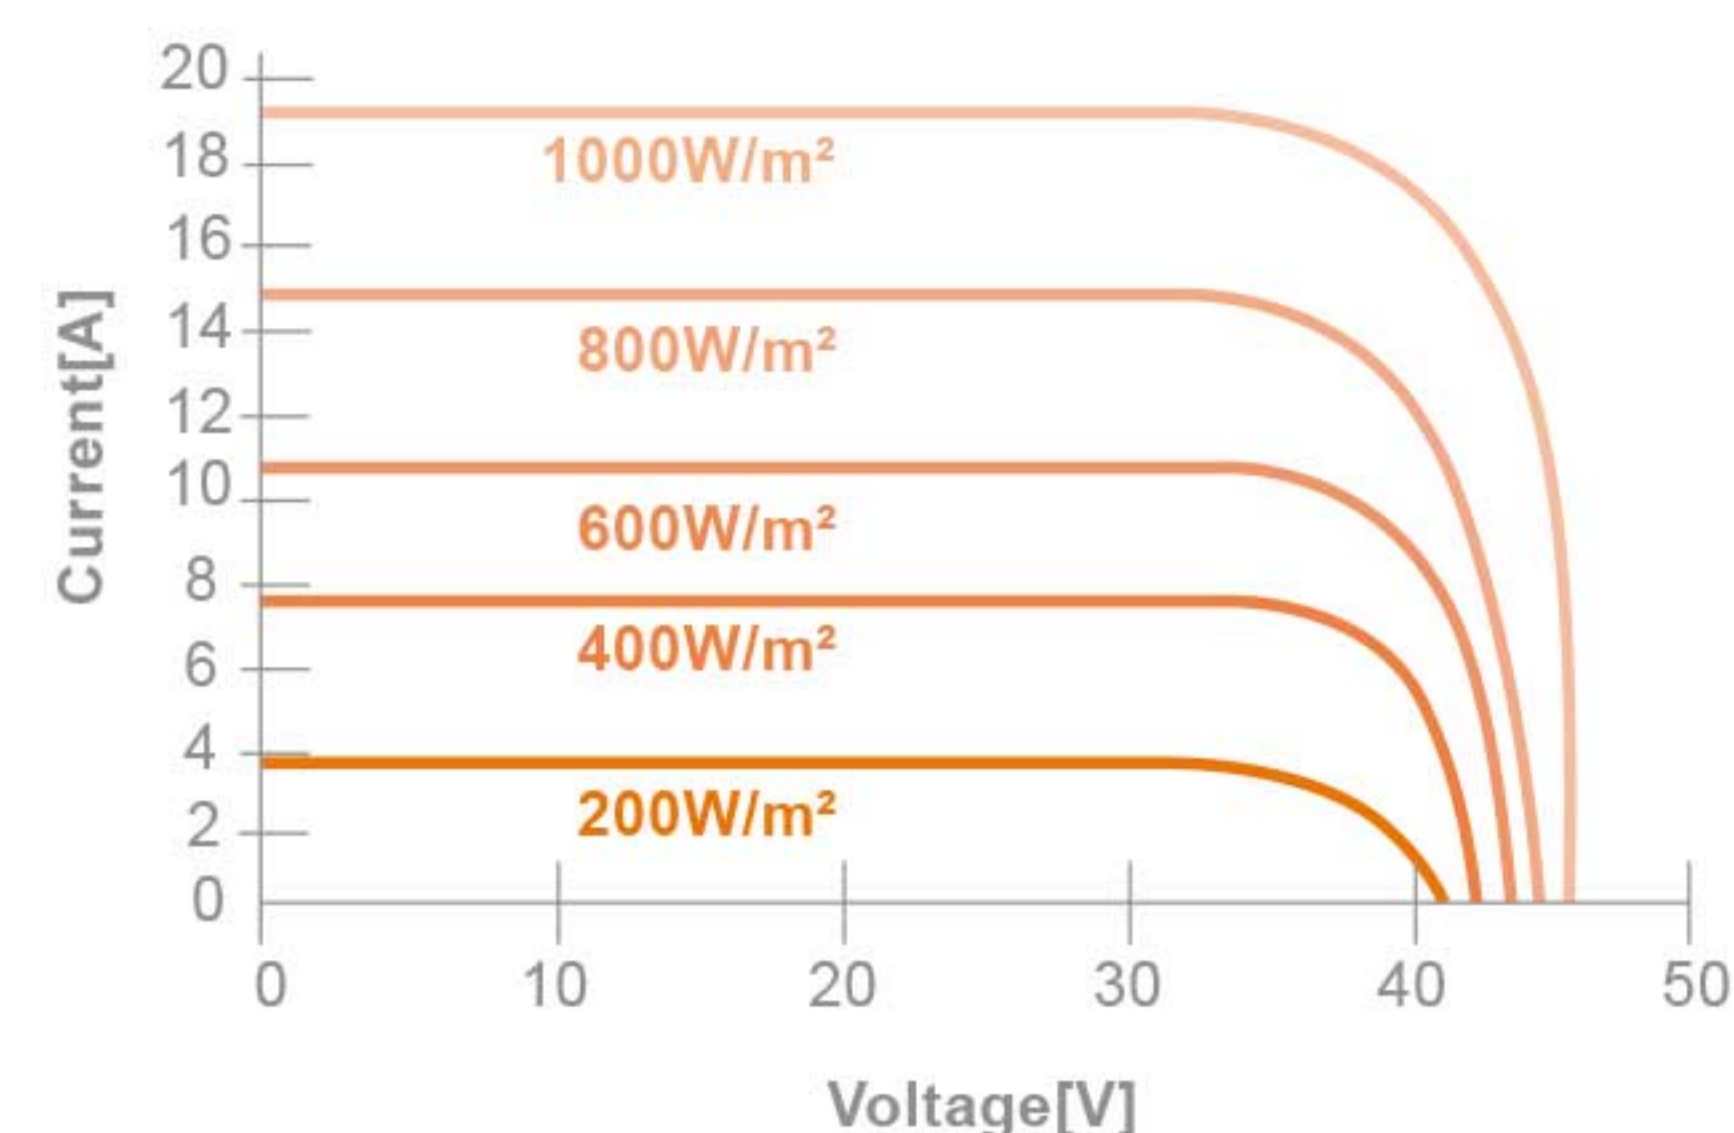

Current-Voltage Curve under different working temperatures

AM1.5 1000W/m²

